


MOORING BUOYS

CRUCIMOOR 2600



CREATING SAFE FAIRWAYS

The SL-MB2600-CR has a 2600mm diameter offering increased visibility & buoyancy in deeper waters

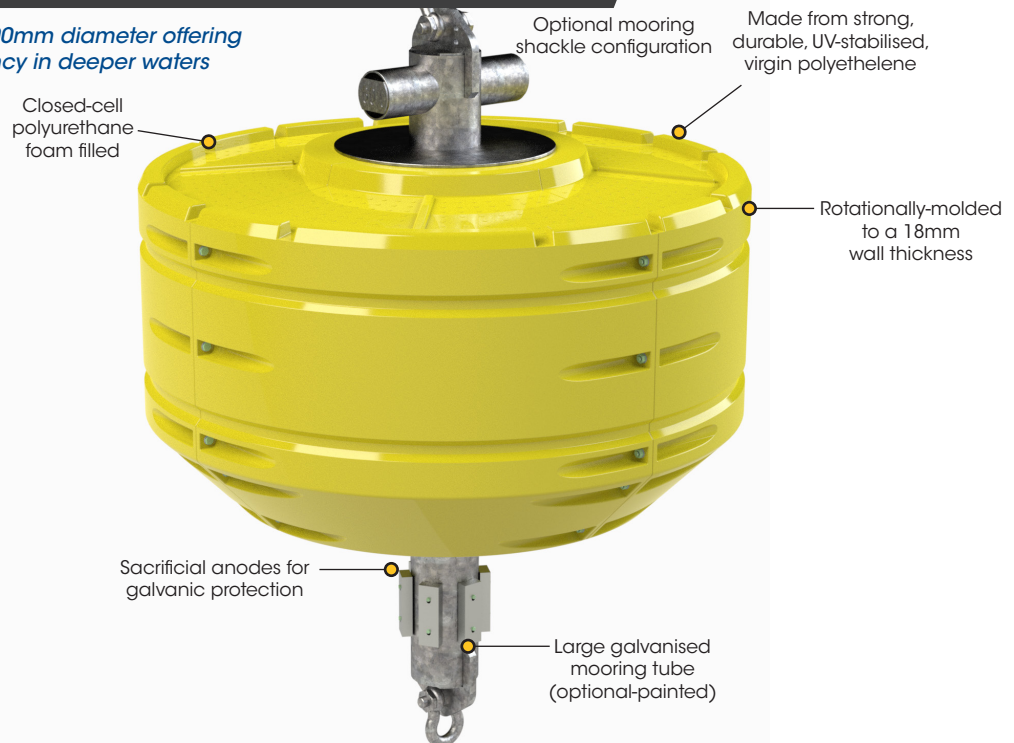

The Sealite Advantage

- High visibility colours
- Strong, polyethylene construction
- Replaceable mooring tube
- Clear identification with optional graphics
- Eco-friendly

The Sealite range of SL-MB2600 Mooring Buoys are designed to offer customers long life and are suitable for most locations.

The SL-MB2600 range is available in 2600mm diameter. The mooring buoys are rotationally-moulded from UV-stabilised virgin polyethylene to a 18mm wall thickness, and are foam filled with closed-cell polyurethane to prevent water ingress in the unlikely event of damage to the outer layer.

The mooring tube is not moulded into the buoy but slides into a tubular section that runs down the centre of the buoy enabling the tube to be replaced at any stage during the product's service life.


Sealite's Mooring Buoys are capable of supporting substantial loads, and are available in a range of colours for clear visibility.

The large galvanised mooring tube will accept large links mooring chain.



MOORING BUOYS

CRUCIMOOR 2600

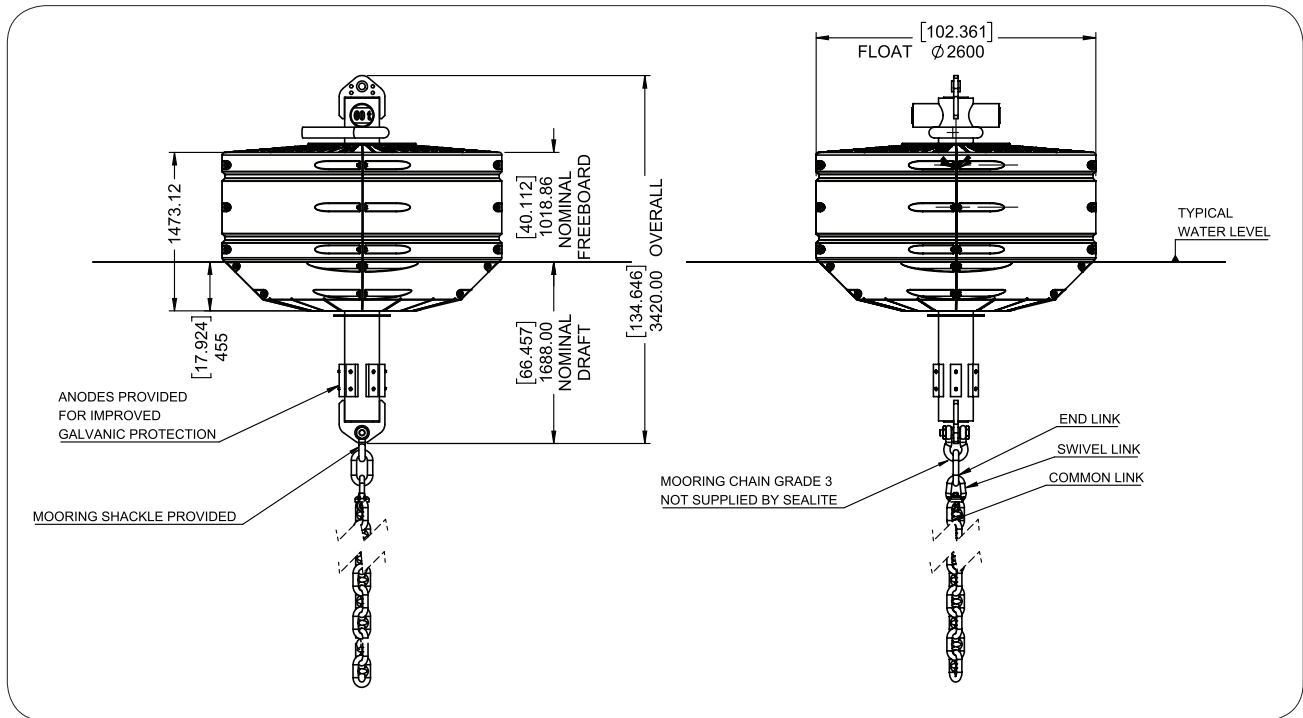

Environmentally Friendly & Recyclable

Sealite buoy products are made from recyclable materials. As a service to customers, individual components and products at the end of their service life may be returned to Sealite for recycling.

| SPECIFICATIONS * * | | SL-MB2600-CR |
|---------------------------------------|--|--|
| General Characteristics | | |
| Available Colours | | |
| Total Float Volume (litres/US gallon) | | Red, Green, White, Yellow as per IALA Recommendations |
| Reserve Buoyancy (kgs/lbs) | | 6710 / 1772 |
| Draft, Maximum (mm/inches) | | 5489 / 12101 |
| Freeboard, Minimum (mm/inches) | | 2600 / 102 ¹ / ₈ |
| Submergence (kg/cm, lb/inches) | | 630 / 24 ⁴ / ₅ |
| Maximum Mooring Load (kgs/lbs) | | 53 / 296 |
| | | 60000 / 132277 |
| Physical Characteristics | | |
| Material | | |
| Wall Thickness (mm/inches) | | Rotationally-moulded UV-stabilised virgin polyethylene |
| Filling | | High tensile strength steel mooring post |
| Height (mm/inches) | | 18 / ³ / ₄ |
| Width (mm/inches) | | Closed-cell polyurethane foam |
| Mass (kg/lbs) | | 3420 / 134 ¹⁶ / ₂₅ |
| | | 2600 / 102 ² / ₈ |
| | | 1470 / 3241 |
| Certifications | | |
| IALA | | Surface colours compliant to IALA E-108 |
| Quality Assurance | | ISO9001:2008 |
| Intellectual Property | | |
| Trademarks | | SEALITE® is a registered trademark of Sealite Pty Ltd |
| Warranty * | | 1 year |

* Specifications subject to change or variation without notice
 * Subject to standard terms and conditions



Options Available

Sealite have a range of mooring chains & accessories
 - ask your representative today how we can supply your complete mooring solution